




# EXPANSION PACK SETUP GUIDE



Please keep the original packaging as you unbox – it is required if you wish to return the equipment.

# HARDWARE SETUP



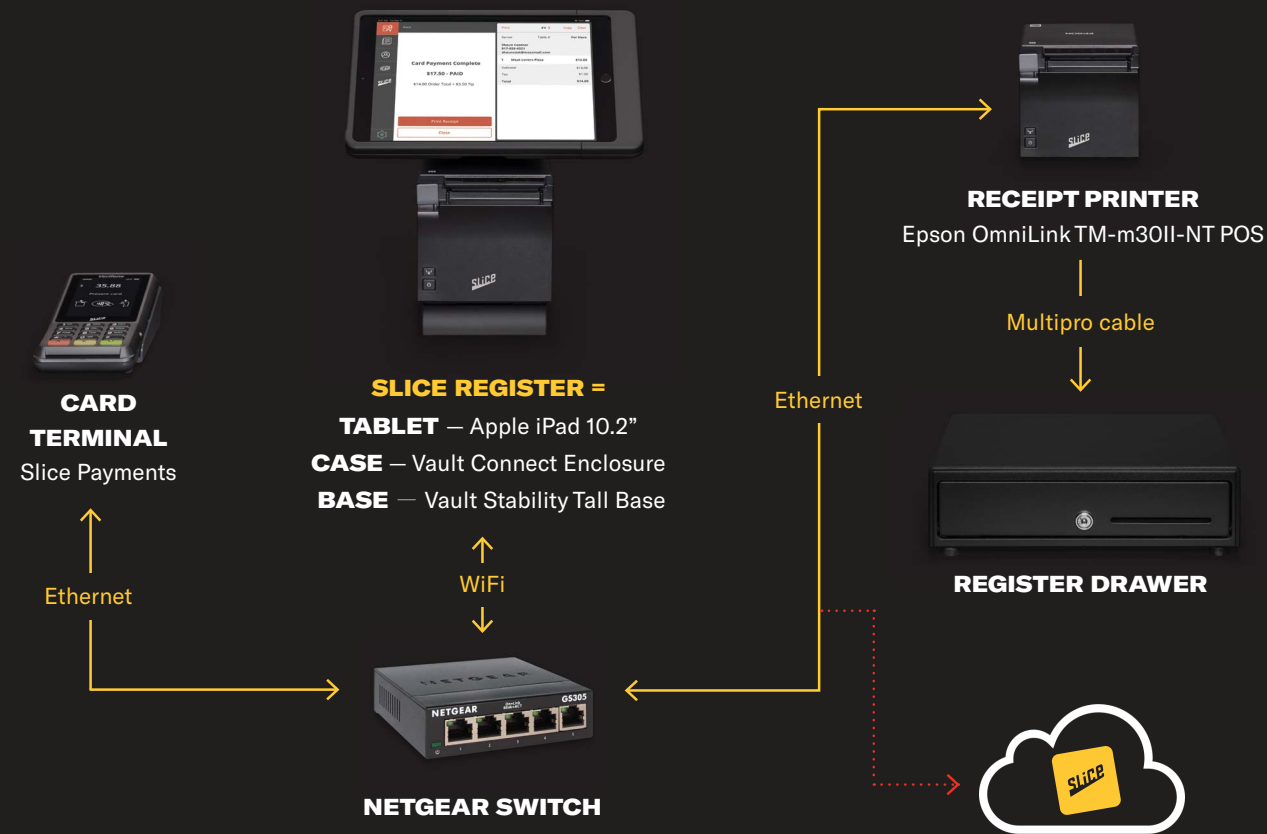


## NETGEAR SWITCH ASSEMBLY

1. Plug in the Netgear Power Plug into the Netgear Switch
2. Plug in Netgear Power Adapter into an outlet via the Surge Protector
3. Plug in one yellow ethernet cable into a port on the Netgear switch, and the other end into the open port on the Cisco Router from the initial register setup. If the six-foot yellow cable is not long enough, swap it for one of the blue cables used in the original Register setup.
4. Plug in the three yellow ethernet cables. These will later connect to the Kitchen Printer, Receipt Printer, and Payment Terminal



## BOX 2 REGISTER DRAWER

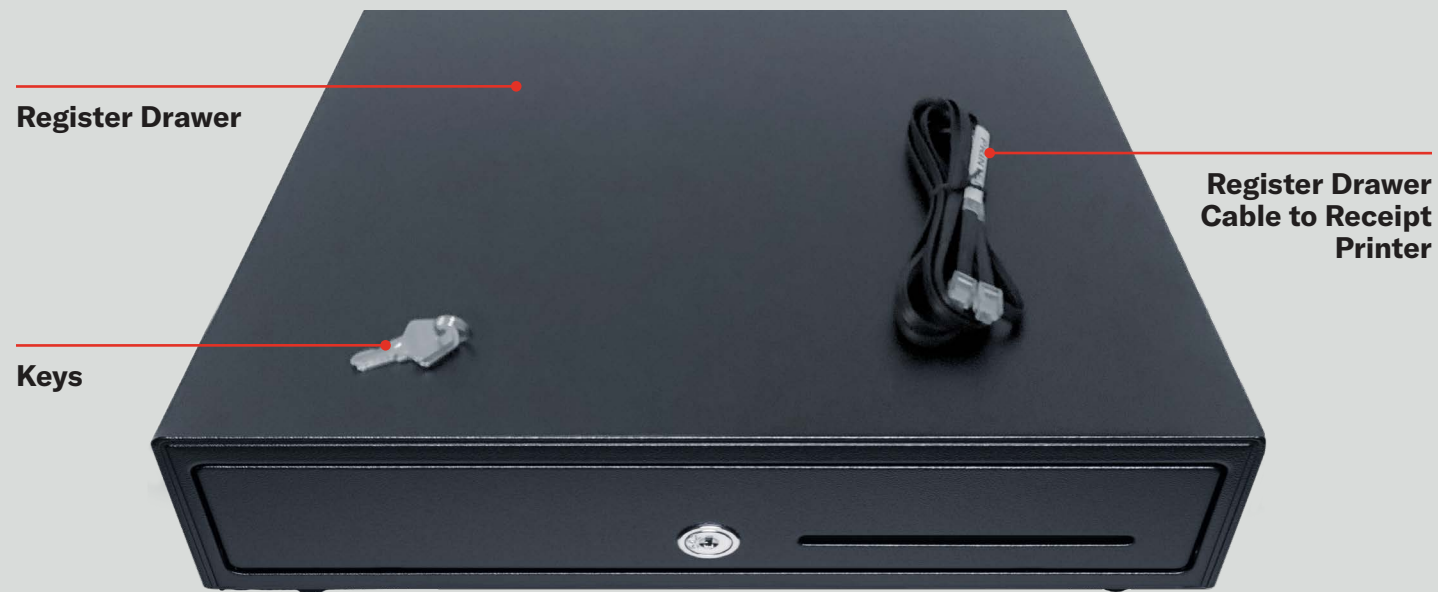

## REGISTER DRAWER ASSEMBLY

1. Flip Register Drawer upside down to access bottom
2. Plug in end of the cable that says “Cash Drawer.” The other end will connect to the Receipt Printer
3. Place the Register Drawer in the desired position on your counter for use



## BOX 3 POS SYSTEM

No assembly required: Simply place the iPad on your Register Drawer and plug the power cable into the surge protector.






## BOX 4 RECEIPT PRINTER



# RECEIPT PRINTER ASSEMBLY

1. Plug the Receipt Printer Power Adapter into the Receipt Printer Power Plug
2. Turn the Receipt Printer so that the panel with the rubber legs is facing you
3. Remove the panel to access ports (this requires some force)
4. Plug in the blue ethernet cable. The other end is connected to the Cisco Router
5. Plug in the Receipt Printer Power Plug. The other end will connect to your Surge Protector
6. Plug in the cable from the Register Drawer with the end that says "printer." The other end is connected to the Register Drawer
7. Pull the cables so that they exit the back panel in the direction you would like (left, up, or right)
8. Reattach the panel to close
9. Open the printer by pulling up on gray tab
10. Add a roll of thermal printer paper. This paper is in Box 7. Note: Thermal paper is glossy and will turn black upon scratching
11. Place the paper so that the roll is coming out of the bottom
12. Close the printer
13. Some paper should be coming out of the bottom
14. Place the printer on the iPad stand below the iPad screen

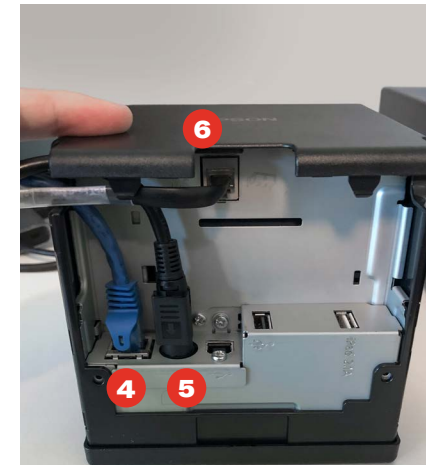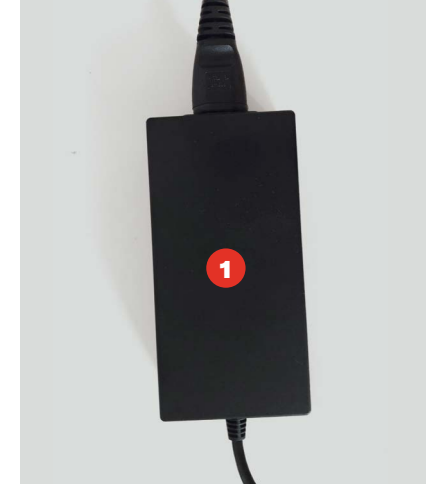

## BOX 5 PAYMENT TERMINAL



## PAYMENT TERMINAL ASSEMBLY

1. Plug the Payment Power Adapter into the Payment Power Plug
2. Flip the Payment Terminal over to access the bottom
3. Plug in the Payment Terminal Power Plug. This will connect to Surge Protector
4. Plug in a blue ethernet cable. Other end is connected to Cisco Router
5. Place the terminal in desired position on Register Drawer



## **BOX 7 CABLES, CORDS, & PAPER**

**2 Extra Kitchen Printer Rolls, Blank**


**2 Extra Receipt Printer Rolls with Slice Logo**

**4 Yellow Ethernet Cable**

**Zip Ties (Optional)**


**3 Blue Ethernet Cables**

**Surge Protector**

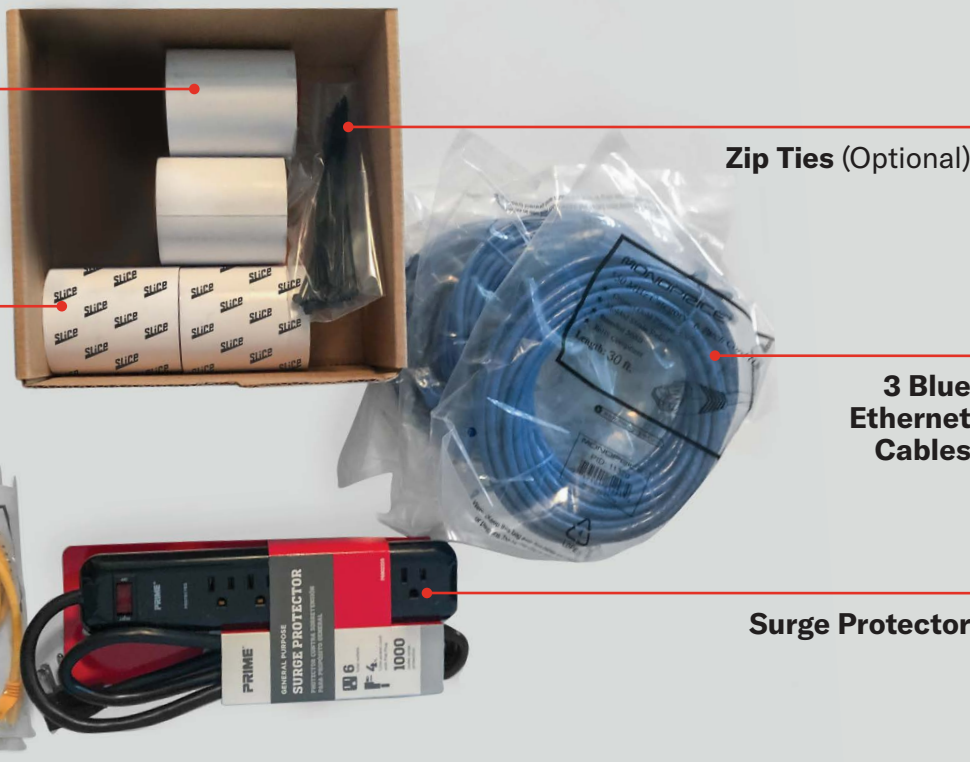




# SOFTWARE SETUP

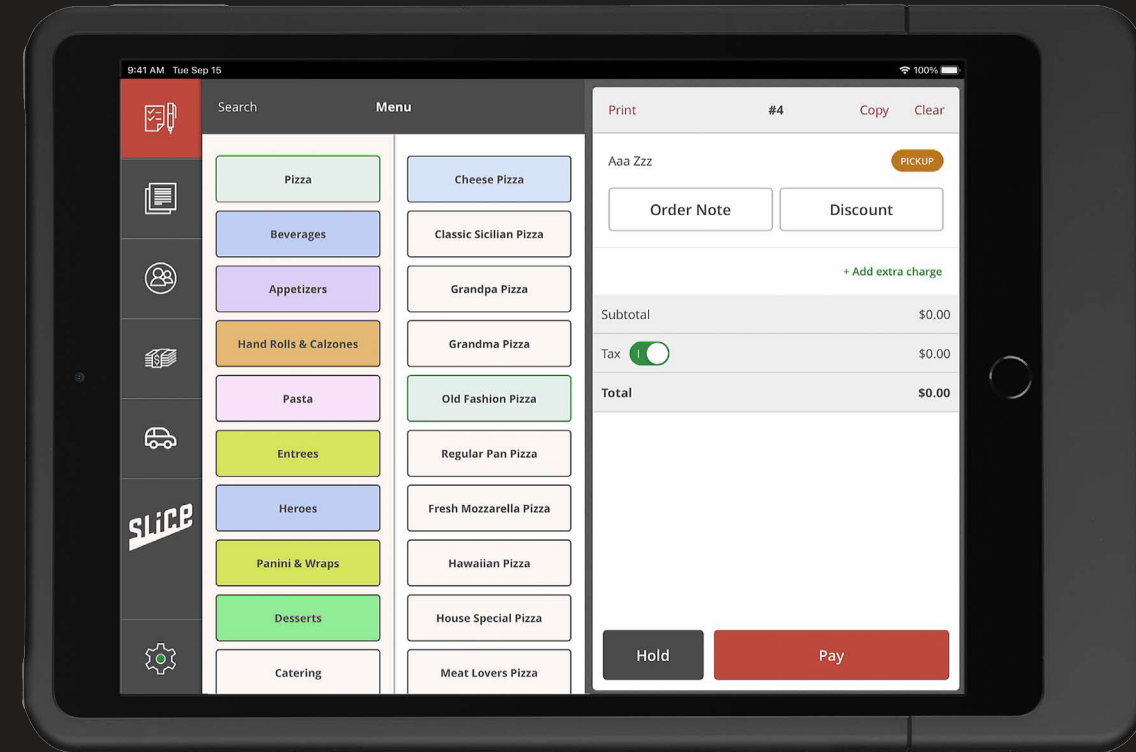


# SET UP IPAD




1. Turn on iPad — the Slice Register App will already be downloaded

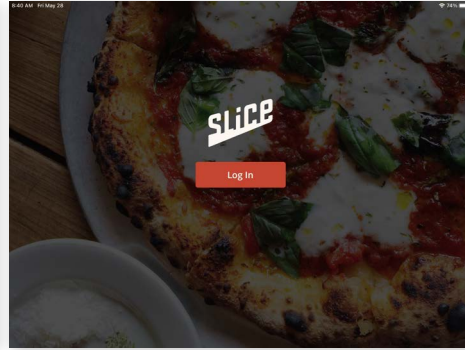


2. Click the Slice Register App

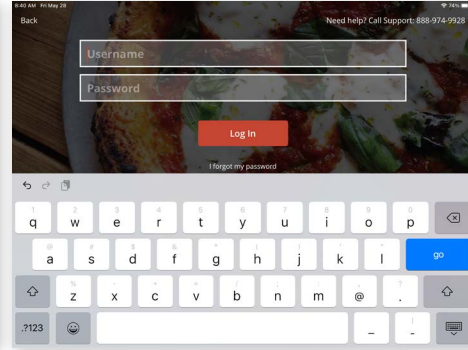


3. Log in with your Owner's Portal credentials.

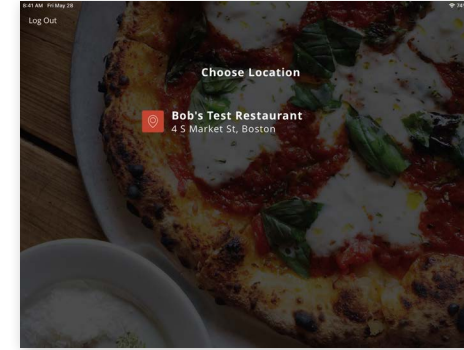

4. Select your restaurant.

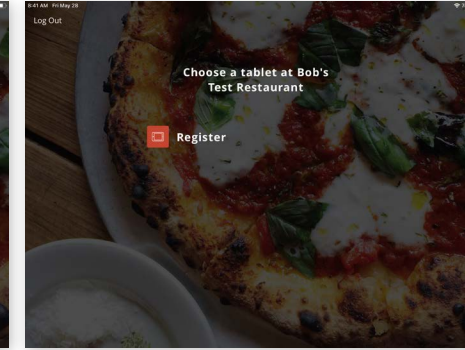


5. Select Register 2 (or the number register you are installing)

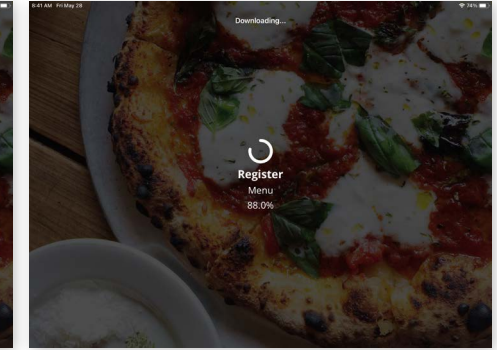

6. Wait for download to complete

# CONFIRM MENU CONTENT

1. Check categories, items, and add-ons
2. Menu will appear exactly how it appears on your Owner's Portal

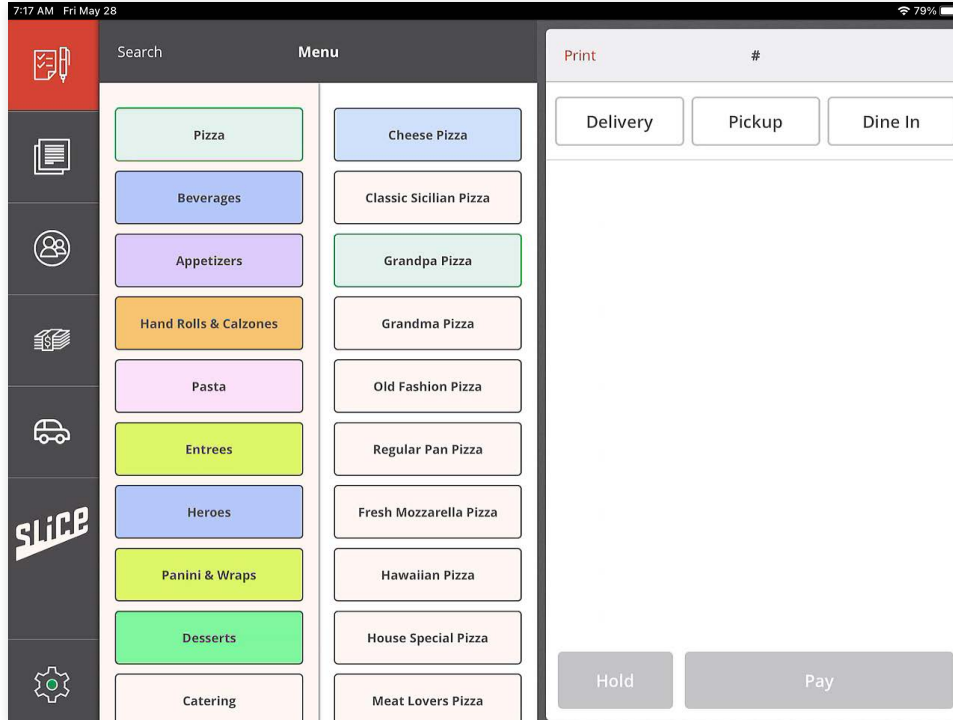


# ACCEPTING INCOMING ONLINE ORDERS


1. Go to Settings
2. Toggle on 'Accept Online Orders'
3. Confirm other Registers aren't already toggled on

## NOTE


Turning this off will not prevent customers from placing orders through Slice

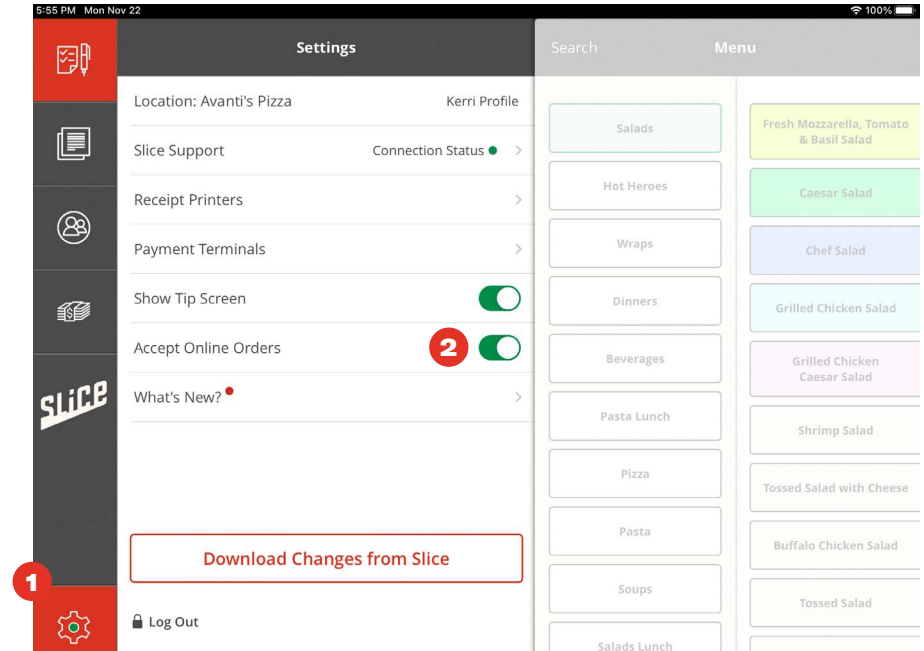


# CONNECT PRINTERS

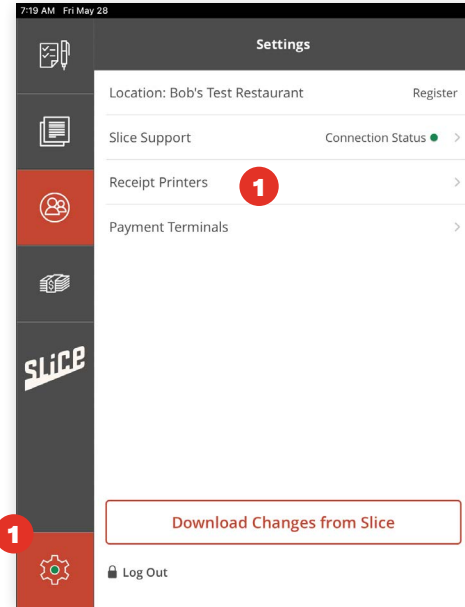

1. Go to Settings (bottom left button) / Receipt Printers





2. Select "OK."

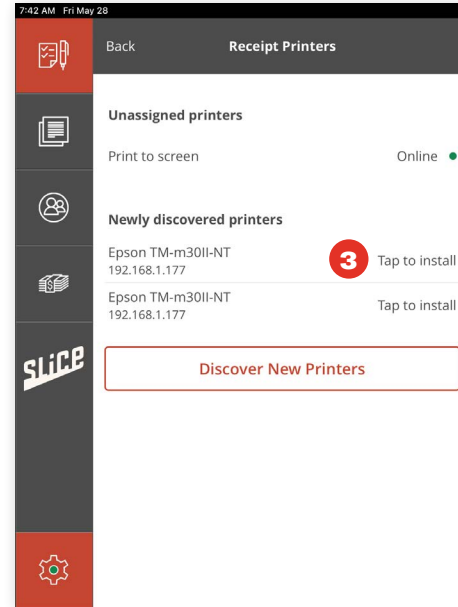


3. Click to "Tap to Install" for the TM-m30II-NT. If this printer is not displayed, reboot the printer and check again.

(continued on next page)


4. Print test page to confirm receipt prints out of correct printer – if it does not, go back and choose a different TM-m30II-NT
5. Enter your preferred name of the printer (we suggest "Receipt Printer 2")
6. Define the printer as "Customer Receipt" or "Kitchen" or "Both"
7. Select whether printing should happen automatically for received online orders

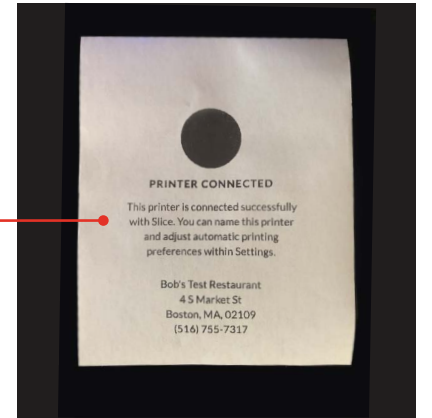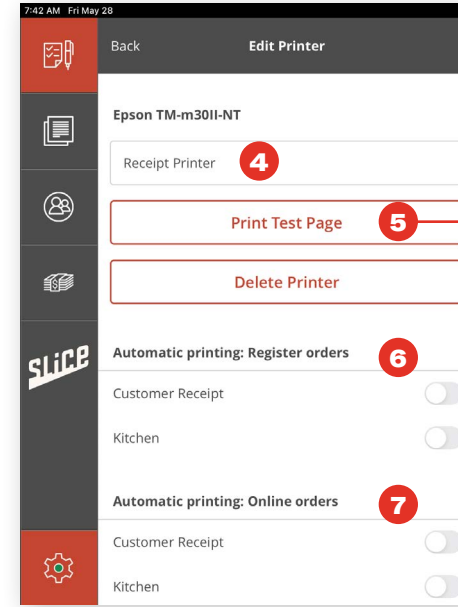

# START REGISTER DRAWER

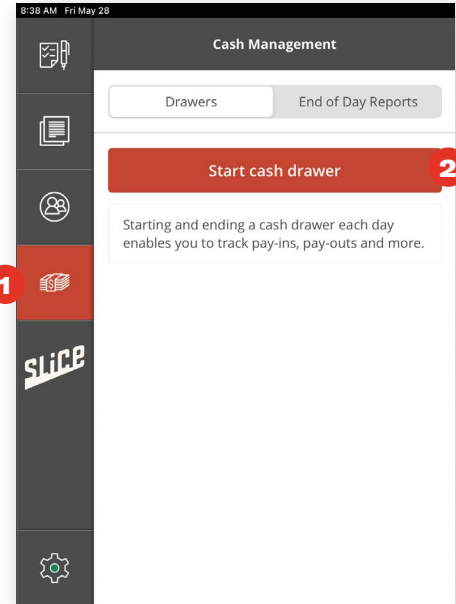

1. Select the Cash Management icon.
2. Start the Register Drawer.

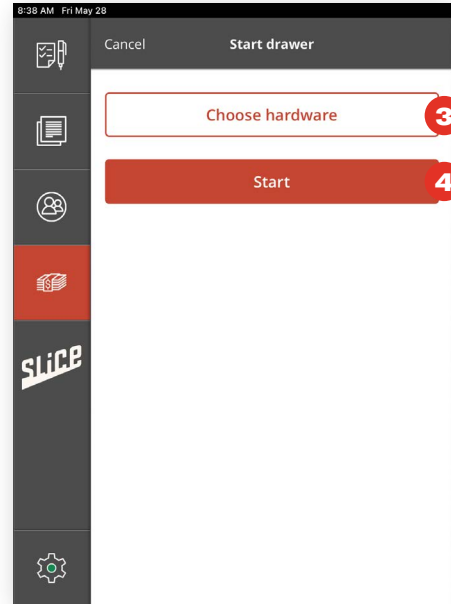

3. Choose hardware > Select the printer that is connected to Register Drawer (Receipt Printer 2)
4. Start > Register Drawer pops open

## NOTE

Register Drawer will not open during sales if Register Drawer hasn't been started

# LOCAL TEST

1. Test a credit card transaction
2. Test multiple payment methods (debit card, manual, Apple Pay, etc.)
3. Test adding a tip after the initial transaction has successfully completed to ensure card adjustments are possible

## NOTE

If these tests work, these will be real charges — we recommend testing with low amounts. You can click +Extra Charge and put \$0.01 to test.

# OPTIONAL STEPS

## **OPTIONAL:** Create any requested Order Filters

- Tap Orders view
- Tap Choose Filter
- Tap Add New Filter Group
- Specify the filter criteria and tap Save

## **OPTIONAL:** Set up Register discount options

- Go to [owners.slicelife.com](http://owners.slicelife.com)
- Log in with the same username and password
- Under “Discounts” navigation bar item in Owner’s Portal, click Register Discounts
- Set up Discount (\$ or %)
- On Register click “Download changes from Slice”
- Test that discounts appear in the menu correctly

## **OPTIONAL:** Set up the preferred Register button layout

- Click “Slice Register” under “Menu” and move the ordering “Menu” and move the ordering
- Check the “Register Only” box for any menu item that the shop does not want to appear online
- (Note: “Non-Display Category” will appear at the bottom by default)
- On Register click “Download changes from Slice”





**QUESTIONS? CALL (888) 974-9928 (OPTION 4)**